

04.01, 04.02, 04.03, 04.04, 04.05, 04.06;

(« »)


04.01),

(04.03 . 04.06).

04.01. 04.06

4.8

5.15


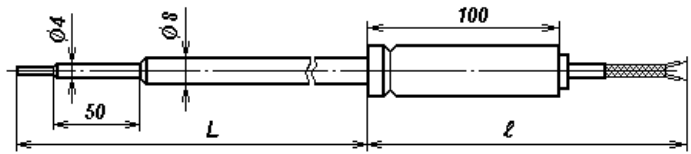


		*; τ _{0,95} ,
	<p>04.01</p>	20
	<p>04.03</p>	3
	<p>04.04</p>	12
	<p>04.05</p>	3

*

(τ_{0,95})


95%

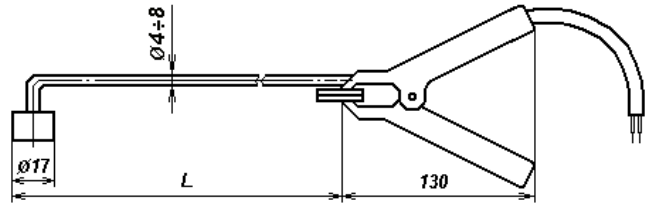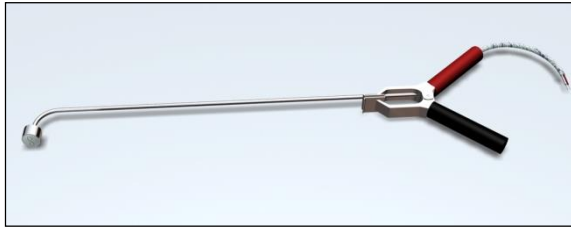

04.06

04.05,

2,5 .



- , °

	0 500	10 . 12 18 10

- : 1 . 5 2-9

1607-87.

HH506RA.

±(0,3+0,05%),


« ».

: K, J, T, E, R, S, N.

1000

« ».

- ,



ℓ : 500, 1000, 1250, 1600, 2000 .

		*	2	10	D,	L,	
						min	max
,	04.01	-060, -260, -050, -250	2	10	8.0	320	1000
	04.03						
	04.04						
	04.05	-063			6,0, 8,0		
	04.06						

* . () . « » . (. 11).



04. - - 2- - 10 - D - L / ℓ ,
ℓ Ë , D.

04.05-062 - 2 - - 10 - 8 - 500 / 1000 .
04.05-062

(),

(10), 8 , 500 , 1000 .

