



201, 202

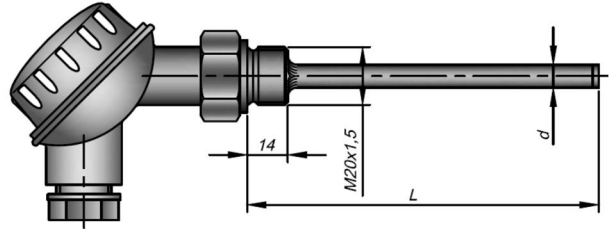

201-010

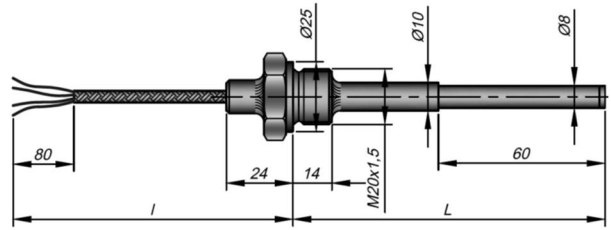

202-064

	100 , Pt100, Pt500		3 155	0 160

- 1.0
- 16
- 6.0, 8.0 ;
- 10 . 12 18 10

201 202

L: 80, 100, 120, 160, 200, 250, 320 .
 ℓ : 2000; 3150; 5000; 8000

		*			d,	L,	
						min	max
201	-010	12 1.5, 16 1.5,	100 , Pt100, Pt500	4, 4, 2	6.0	80	320
202	-064	G 1/2"		4, 4	4, 6, 8, 10		

* . « » .

20 - - - - . -d - L (ℓ)

201-010 - G1/2" - 100 - 4 - 6 - 320 .

202-064 - 16 - Pt100 - 4 - 6 - 320/2000 .

201-010

202-064

100 , G1/2" ,

Pt100,

16 2,

6 , 320 .

6 , 320

2000 .